



AUTOMATIC ROLL FILTERS

FEATURES

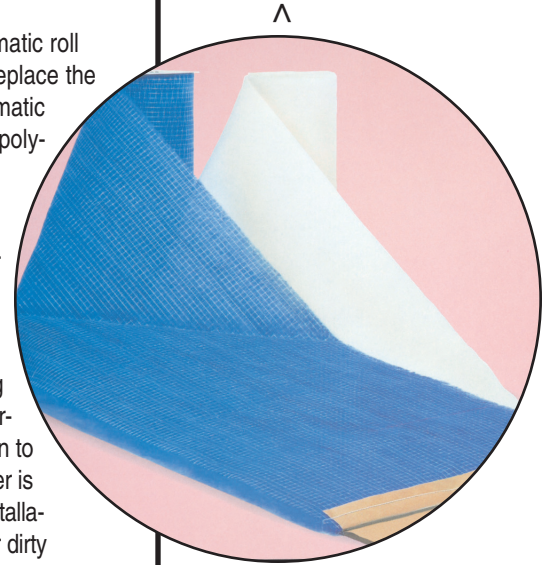
Glasfloss manufactures a complete line of roll filters for automatic roll machines. Glasfloss Automatic Roll Filters are designed to replace the original equipment filter with no modification. Glasfloss Automatic Roll Filters are available in different grades of fiberglass and polyester media in most standard widths.

CONSTRUCTION

Glasfloss Automatic Roll Filters are made with high quality progressively dense fiberglass or 100% non-woven polyester media. The air leaving side incorporates a scrim backing for added support in the air stream. The wide variety of core types meet exacting standards to assure easy installation into existing original automatic roll equipment. Each automatic roll filter incorporates a heavy-duty kraft paper leader and trailer that are sewn to the media allowing for easy installation. Each automatic roll filter is sealed in a plastic bag that keeps the filter media clean until installation. The plastic bag is also useful when disposing of the old or dirty roll filter.

APPLICATIONS


Industrial facilities, commercial buildings, government installations, schools and universities use Glasfloss Automatic Roll Filters. Whether the automatic roll machine is vertical or horizontal, Glasfloss Automatic Roll Filters are available on cores designed to fit all major roll machine manufacturers.



- Progressively Dense Fiberglass or 100% Non-woven Polyester
- Scrim Backing
- Heavy-duty Paper Leader and Trailer
- Packaged in Heavy-duty Plastic Bags and Cartons

SPECIFICATIONS

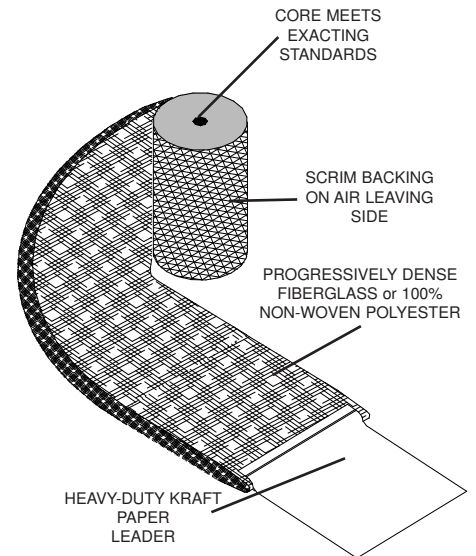Glasfloss Automatic Roll Filters are designed to fit in automatic, semi-automatic and manual type roll filter machines without modification to existing hardware. Glasfloss Roll Filters shall incorporate progressively dense fiberglass media or 100% non-woven polyester media. For added strength, the progressively dense fiberglass and 100% non-woven polyester grades of media shall incorporate a scrim backing on the air leaving side. Glasfloss Automatic Roll Filters shall incorporate a heavy-duty paper leader and trailer that is sewn to the media. The automatic roll filter's media standard length shall be sixty-five feet. Each roll is packaged in a heavy-duty plastic bag and carton that keeps the media clean until installation.



“Serving You With Locations Throughout The Nation”

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

AUTOMATIC ROLL FILTERS

Fiberglass Specifications

EC II

EC II Automatic Roll Filters shall consist of a nominal 2" thick continuous filament fiberglass of graduated density with a uni-directional scrim backing. EC II media shall be blue in color. EC II media is engineered for moderate dust loading applications. The fiberglass shall be treated with a non-toxic, odor-free, non-migratory tackifier. Heavy-duty kraft paper leader and trailer shall be sewn to the media to facilitate installation and removal. The media shall be wound on the specified core and shall be compatible for installation into the original equipment without modification. The media shall be sixty-five feet in length. The media shall have a 77% Average Arrestance per ASHRAE 52.1 Test Standard. EC II Automatic Roll Filters shall incorporate media that is Class 2 under U.L. std. 900. The roll shall be packaged in a plastic bag and heavy-duty carton to prevent contamination of the filter media.

Polyester Specifications

1250

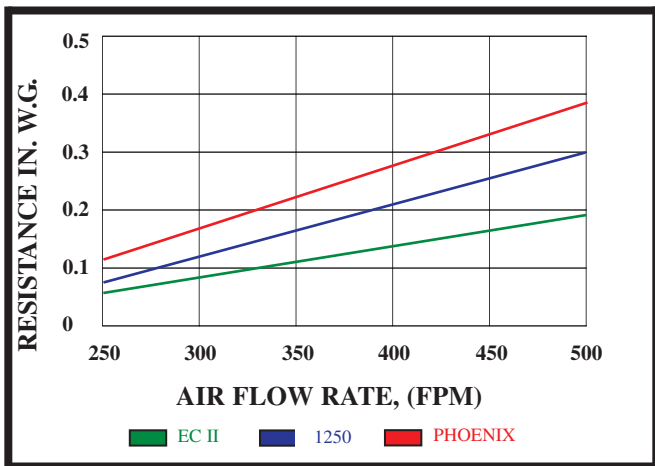
1250 Automatic Roll Filters shall consist of a nominal 5/8" thick 100% non-woven polyester media with a scrim backing. 1250 media is engineered for moderate dust loading applications. 1250 media shall be white in color. Heavy-duty kraft paper leader and trailer shall be sewn to the media to facilitate installation and removal. The media shall be wound on the specified core and shall be compatible for installation into the original equipment without modification. The media shall be sixty-five feet in length. The media shall have a 70% Average Arrestance per ASHRAE 52.1 Test Standard. 1250 Automatic Roll Filters shall incorporate media that is Class 2 under U.L. std. 900. The roll shall be packaged in a plastic bag and heavy-duty carton to prevent contamination of the filter media.

PHOENIX

PHOENIX Automatic Roll Filters shall consist of a nominal 3/4" thick 100% non-woven polyester orange and white media with a scrim backing. PHOENIX media is engineered for heavy dust loading applications. PHOENIX media is impregnated during manufacturing with a non-migratory tackifier. Heavy-duty kraft paper leader and trailer shall be sewn to the media to facilitate installation and removal. The media shall be wound on the specified core and shall be compatible for installation into the original equipment without modification. The media shall be sixty-five feet in length. The media shall have an 88% Average Arrestance per ASHRAE 52.1 Test Standard. PHOENIX Automatic Roll Filters shall incorporate media that is Class 2 under U.L. std. 900. The roll shall be packaged in a plastic bag and heavy-duty carton to prevent contamination of the filter media.


STANDARD PRESSURE DROP

Test Filter Size 24" x 24" Nominal









MINIMUM PARTICLE SIZE EFFICIENCY

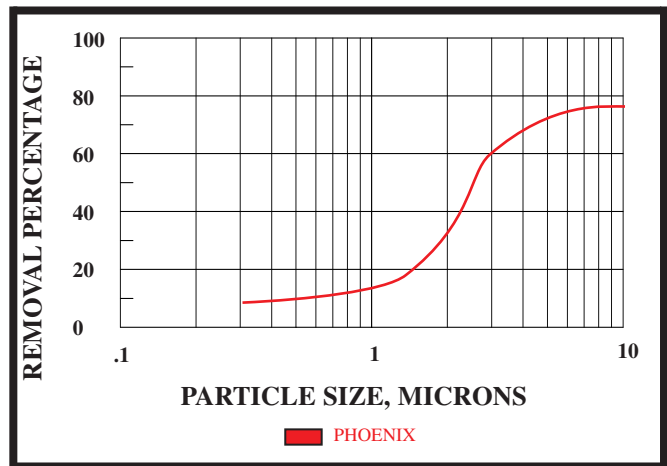Test Filter Size 24" x 24" Nominal



Automatic Roll Filter Core Identification Guide

American Air Roll-O-Matic Kennard Herman-Nelson = 8" end plates Electro-Air	<p>Type AA core is 3/4" metal pipe. Core ends are 15/16" and 13/16" with end disks of 11" diameter on both ends.</p>  <p style="text-align: right;">Glasfloss ID Code AA</p>	<p>Roll Width</p> 20-1/4" 22-1/4" 24-3/4" 31-7/8" 32-3/4" 38-1/2" 39-7/8" 44-3/4" 56-3/4" 68-7/8"	<p>*Model</p> 21AA 22AA 25AA 32AA 03AA 39AA 40AA 04AA 05AA 06AA	Farr Automatic Manual	<p>Type FA core is 2-1/8" I.D. Notched fiberboard tube with no drive pin, discs or cups. Most Farr V-8 (vertical) units use a 1-3/4" I.D. core.</p>  <p style="text-align: right;">Glasfloss ID Code FA</p>	<p>Roll Width</p> 8-3/4" 14-3/4" 20-3/4" 26-3/4" 32-3/4" 38-3/4" 44-3/4" 50-3/4" 56-3/4" 68-3/4"	<p>*Model</p> 09FA 15FA 21FA 27FA 03FA 39FA 04FA 51FA 05FA 06FA
Cambridge Auto Roll	<p>Type CA core is 3/4" metal pipe. Core ends are 15/16" and 13/16". Metal discs available, specify when ordering.</p>  <p style="text-align: right;">Glasfloss ID Code CA</p>	<p>Roll Width</p> 23-3/4" 32-3/4" 44-3/4" 56-3/4" 65-3/4" 69"	<p>*Model</p> 02CA 03CA 04CA 05CA 06CA 09CA	Continental Conomanual Conomatic Commercial Full-Flo Mine Safety Appl. (MSA)	<p>Type CO core is 3" I.D. fiberboard tube with drive pin 2-1/2" from one end of tube only. No cups or discs are used.</p>  <p style="text-align: right;">Glasfloss ID Code CO</p>	<p>Roll Width</p> 21-7/8" 31-7/8" 43-7/8" 55-7/8" 67-7/8"	<p>*Model</p> 02CO 03CO 04CO 05CO 06CO
Trane Carrier	<p>Type TR (Trane) CR (Carrier) core is 2-7/16" I.D. fiberboard tube with a metal cup secured and recessed to a depth of 1-1/2" in each end. The cups are stamped to form a 1-1/2" square.</p>  <p style="text-align: right;">Glasfloss ID Code TR</p>	<p>Roll Width</p> 19-3/8" 21-3/8" 25-3/4" 31-3/8" 35-3/8" 38-3/4" 45-3/8" 50-1/4" 54-3/8" 59-3/8" 61-3/4" 63-3/8"	<p>*Model</p> 19TR 21TR 25TR 31TR 35TR 38TR 45TR 50TR 54TR 59TR 61TR 63TR	BLC	<p>Type BLC core is 1-1/2" I.D. EMT Conduit with 11" end plates recessed 1-3/8" from each end of core.</p>  <p style="text-align: right;">Glasfloss ID Code BLC</p>	<p>Roll Width</p> 34-5/8" 46-5/8" 58-5/8" 70-5/8"	<p>*Model</p> 35BLC 47BLC 59BLC 71BLC

*The model number must be added as a suffix to the corresponding media designation to obtain proper part number.

"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.

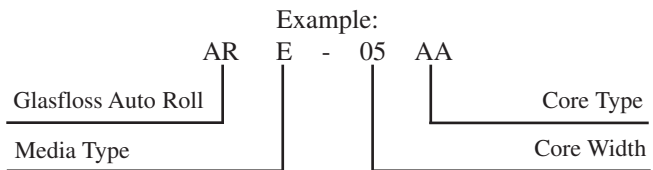
AUTOMATIC ROLL FILTER SPECIFICATIONS

Glasfloss Automatic Roll Filters are designed to fit in automatic, semi-automatic and manual type roll filter machines without modification to existing hardware. Glasfloss Automatic Roll Filters shall incorporate progressively dense fiberglass media or 100% non-woven polyester media. For added strength, the progressively dense fiberglass and 100% non-woven polyester grades of media shall incorporate a scrim backing on the air leaving side. Glasfloss Automatic Roll Filters shall incorporate a heavy-duty paper leader and trailer that is sewn to the media. The automatic roll filter's media standard length shall be sixty-five. Each roll is packaged in a heavy-duty plastic bag and carton that keeps the media clean until installation.

AUTOMATIC ROLL FILTER MEDIA SPECIFICATIONS

- E: EC II - Nominal 2" fiberglass media with unidirectional scrim backing. The media shall be blue in color. For moderate dust loading applications.
- P: 1250 - Nominal 5/8" 100% Non-woven polyester media with scrim backing. The media shall be white in color. For moderate dust loading applications.
- X: PHOENIX - Nominal 1" 100% Non-woven polyester media with scrim backing. The media shall be orange and white in color. Tackified for heavy dust loading applications.

Glasfloss Auto Roll Ordering Code



Glasfloss is proud to be an Energy Star Partner. The Energy Star Service and Product Provider Partnership is available to organizations that provide energy efficiency related products and/or services to the commercial buildings and industrial plants in the United States.

Distributed by:

Filter Services of Arizona
3396 Bank Street
Kingman, Arizona 86409

Phone 1 800 878-2199
Fax 1 800 878-2149



"Serving You With Locations Throughout The Nation"

Glasfloss has a policy of uninterrupted research, development and product improvement and reserves the right to change design and specifications without notice.